


ADDING BROW PAD

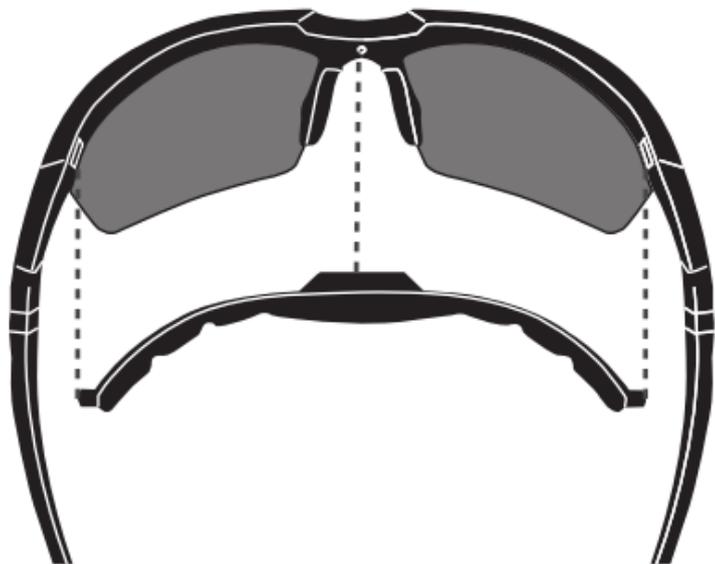

The Brow pad is removable and replaceable. The Brow pad is secured at 3 points. Insert the center point into the brow bar and finish by pressing the two outer points into the brow bar.

MAINTENANCE: Wiley X lenses are specially coated to offer superior abrasion resistance. Please follow below instructions to prolong the life of your lenses and keep them performing at their best:

- Clean lenses with water only.
- Do not use solvents or special cleaners.
- Use micro-fiber cleaning cloth provided to gently wipe clean.
- Never use paper products to clean and avoid wiping lens surface when dry and/or dirty as this may potentially scratch the lens.

WARNING: Wiley X brand eyewear is tested tough. However, impact resistant eyewear is not unbreakable and does not provide unlimited eye protection under all circumstances and conditions. Misused, abused, scratched and/or damaged eyewear can reduce impact protection (and void your limited warranty). Dirty and/or wet eyewear can impair vision and reduce safety (resulting in personal injury and/or property damage). Keep your Wiley X eyewear clean with water only. Do not use solvents or abrasives as it could scratch or damage the product reducing its effectiveness. Store your Wiley X eyewear in the protective case provided to prolong the life of the lenses. Most of all, take all appropriate precautions when wearing your Wiley X eyewear during hazardous and/or dangerous activities and conditions. Wiley X, Inc. is not responsible for personal injury, property damage or losses incurred while using Wiley X brand products.



WILEYX INC: 1.800.776.7842 // 925.243.9810 // WILEYX.COM
7800 PATTERSON PASS ROAD, LIVERMORE CA 94550 USA
WILEY X EUROPE LLC: +45 96 93 00 45 // WILEYX.EU
SØNDERGADE 8-10 7570 VEMB DENMARK

ICGUARD[0]




GUARD INSTRUCTIONS

COPYRIGHT © 2014 WILEY X, INC. ALL RIGHTS RESERVED.

WILEY X, WX, BLACK OPS, logos, tag lines and product names are trademarks or registered trademarks (marcas registradas) of Wiley X, Inc. in the U.S. and other countries. Logos © 2007-2014 Wiley X, Inc. All rights reserved.

INSERTING LENSES INTO FRAME - STEP 1

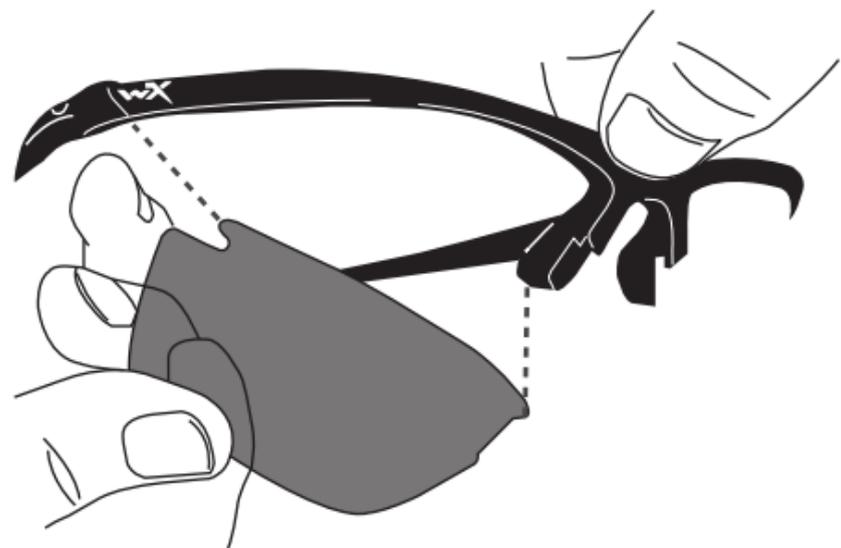


Engage the longer hook of the lens into the frame close to the temple.

INSERTING LENSES INTO FRAME - STEP 2



Align the short lens hook into slot of the frame in the nasal area of the frame. Once aligned simply squeeze the lens into the brow bar until the lens snaps into place.

REMOVING A LENS FROM FRAME

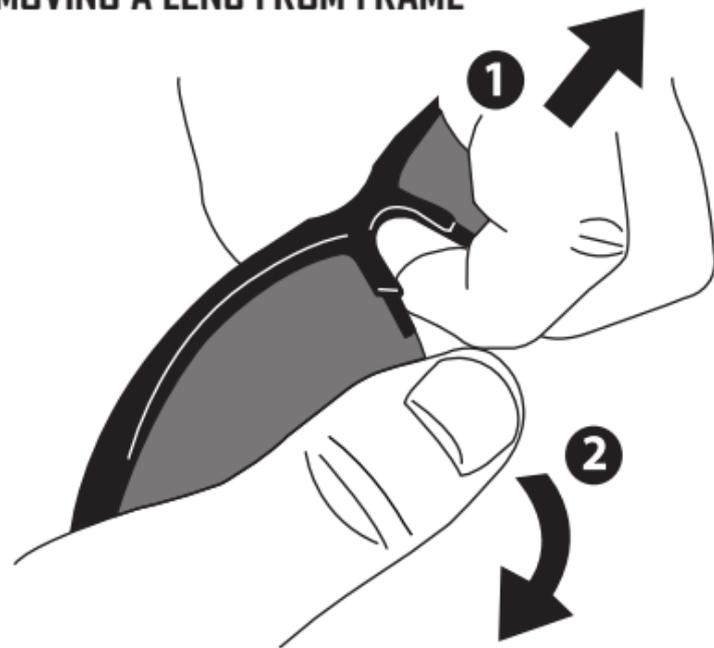

Hold the Guard spectacle as pictured.

1. Stress the frame in the nasal area as directed by the arrows shown above.
2. Simultaneously rotate the lens with your other hand. The lens will rotate out of the frame temple.